



Design Radiators by ISAN

Space

The new spatial model stands out for its simple elegance and distinctive rounded profiles. It divides the interior space stylishly, while highlighting the originality of your interior design.



connection sets
→ 146



electric regulators
→ 154



colour ref. chart
→ 159





Space



Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016	Electric
DKOS 0820 0515	80	9,8	3,0	1,225	482	600	50	✓	✓
DKOS 1275 0515	80	15,1	4,7	1,225	765	800	50	✓	✓
DKOS 1795 0515	80	20,5	6,5	1,225	1041	1000	50	✓	✓

For ordering procedure see page 160 / The weight of radiators does not include water and packaging.


Technical information

Material	steel profiles 30x30 mm steel pipes Ø 18 mm
Connection threads	4xG1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	10, 16, 22

Modification options


Surface treatment	colour
Height range [mm]	NO
Length range [mm]	NO
Electric version	YES (additional charge)
Standard connection (SK)	STANDARD
Middle connection (SM)	NO
Side connection (SB)	NO
One-sided into space fixing	YES

Type height (H) / length (L) [mm]

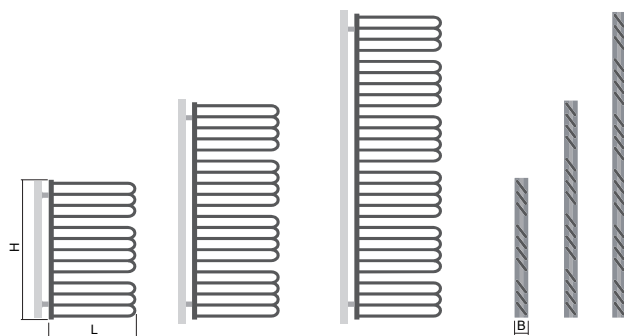


H 0820	H 1275	H 1795
L 0515	L 0515	L 0515

Mounting



Type	X [mm]	A [mm]
Metal brackets	55-65	555-565

Connection options



The type of connection must be specified in the order; for more information see page 160, positions 13 and 14.



One-sided into space fixing